


**THOMAS KLOPE ASSOCIATES, INC.**  
 LANDSCAPE ARCHITECTS

1580 W. EL CAMINO REAL  
 SUITE 13  
 MOUNTAIN VIEW, CA 94040  
 T: 650.691.1000  
 F: 650.691.1014  
 www.klope.com  
 CALIFORNIA RLA # 2337

**PURPLE ORCHID PROPERTY**  
 26296 WEST FREMONT ROAD  
 LOS ALTOS HILLS, CALIFORNIA

**FENCE PERMIT APPLICATION**




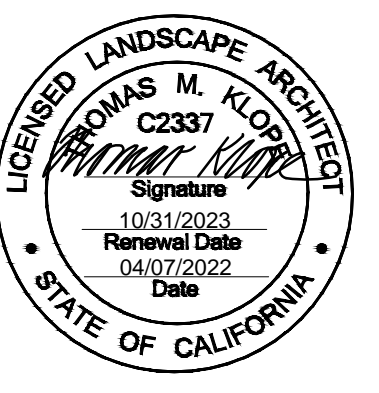


DATE: REVISION:  
 04/07/22 PER TOWN COMMENTS

**LANDSCAPE FENCING PLAN**

DATE: 03/15/22  
 DRAWN: KL  
 CHECKED: TK  
 SCALE: 1/16" = 1'-0"

L.1

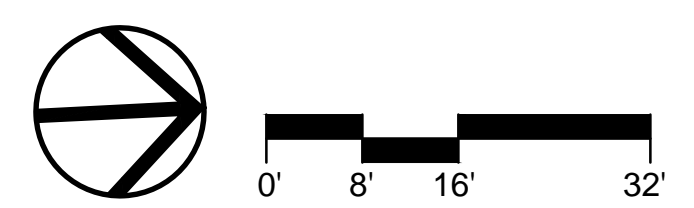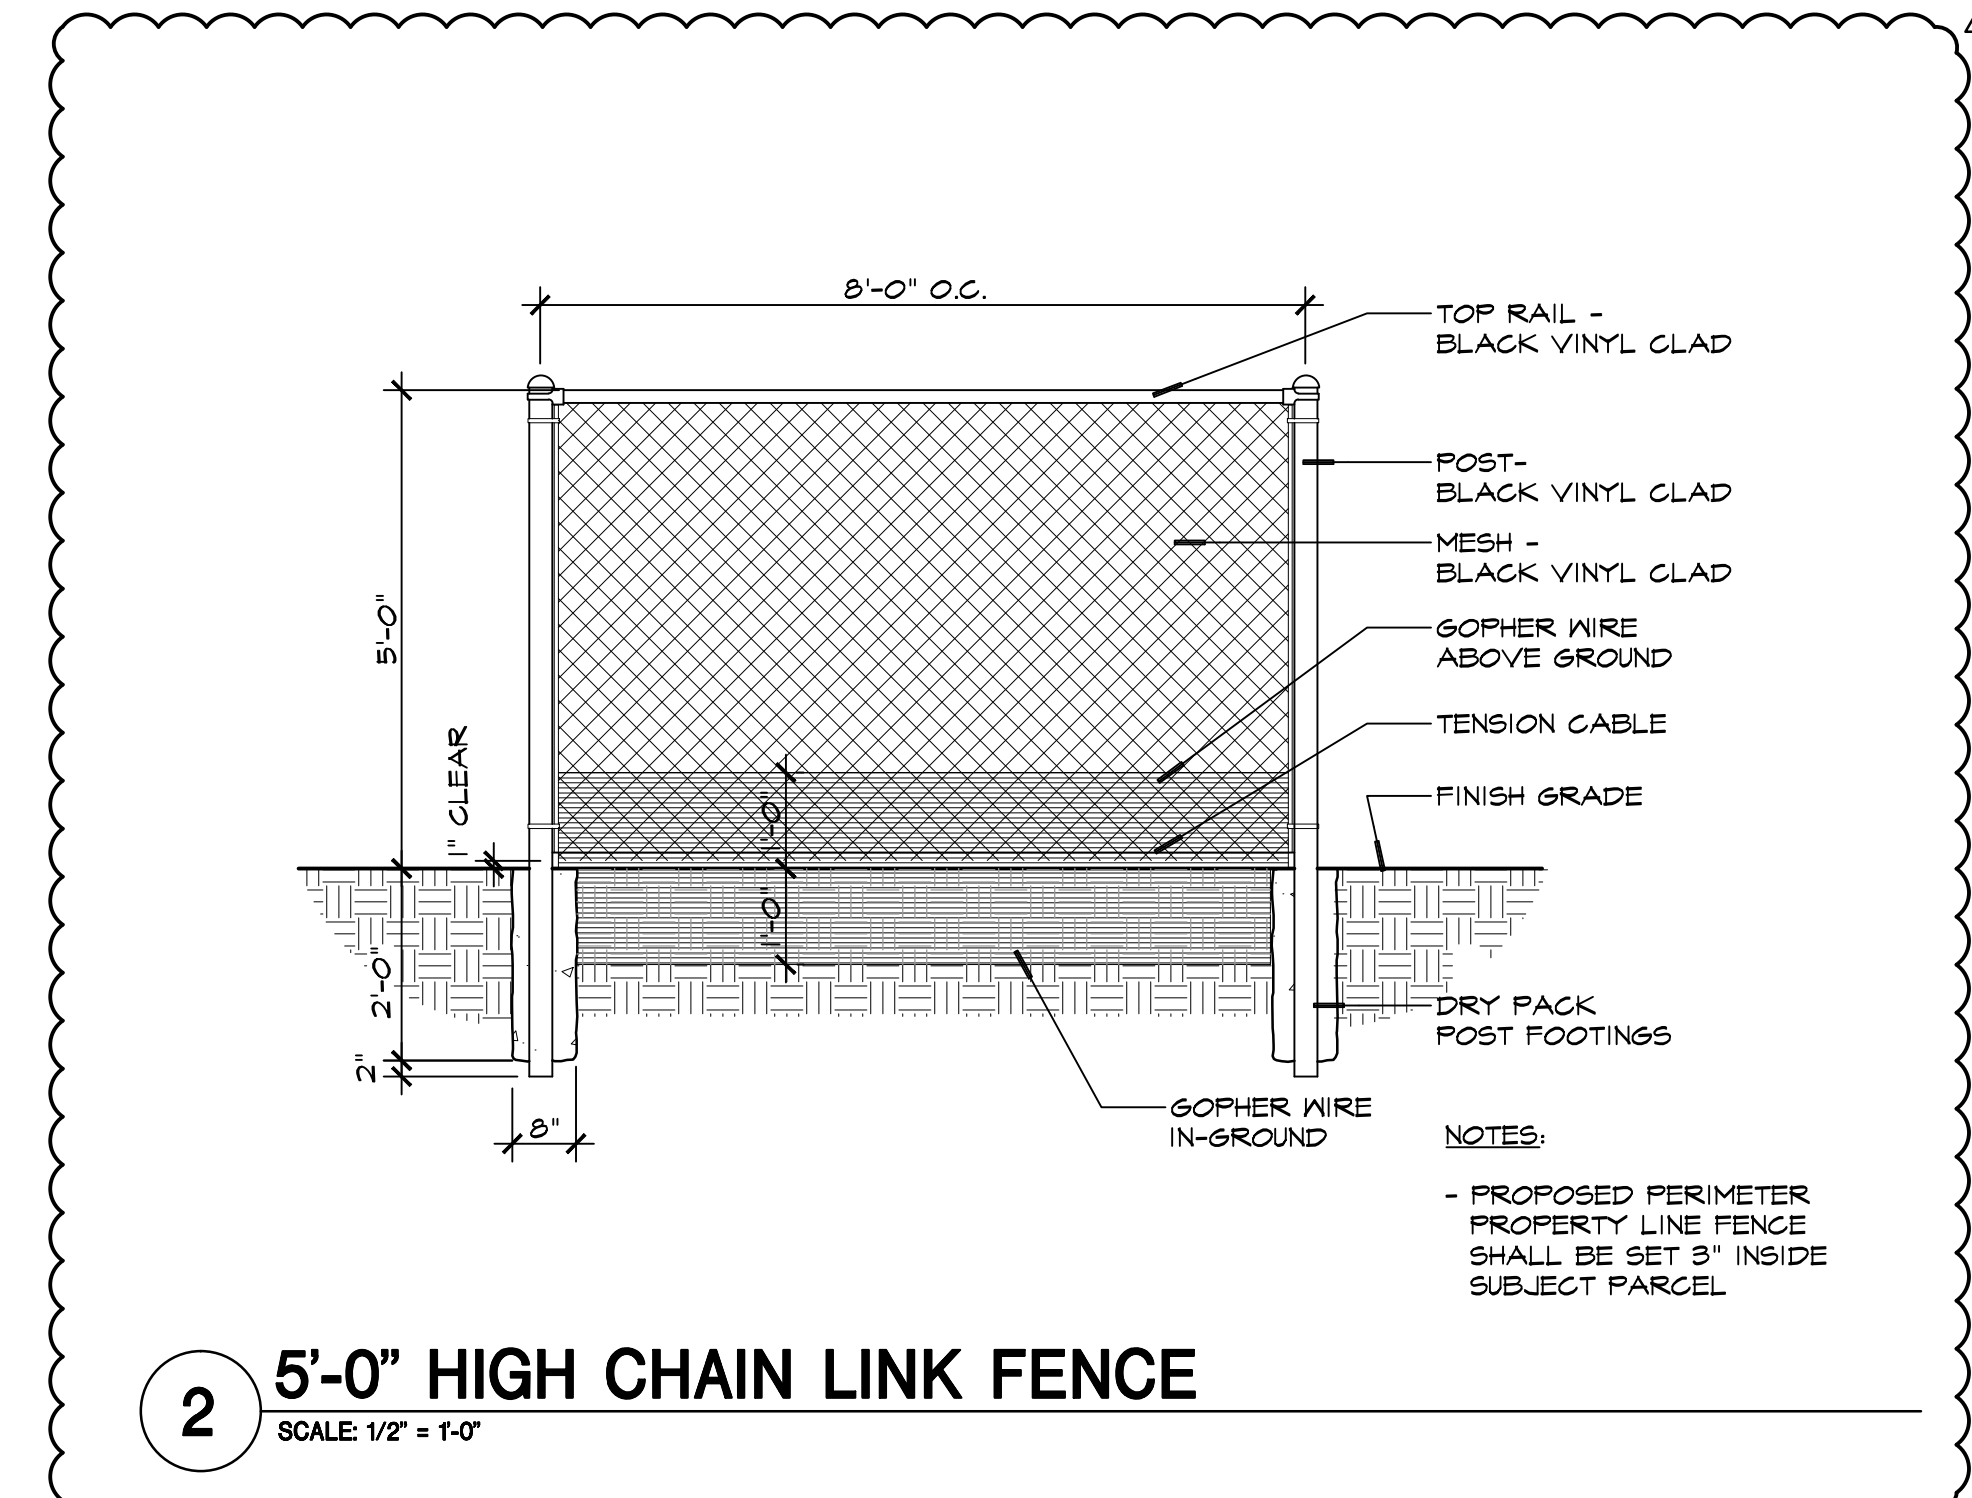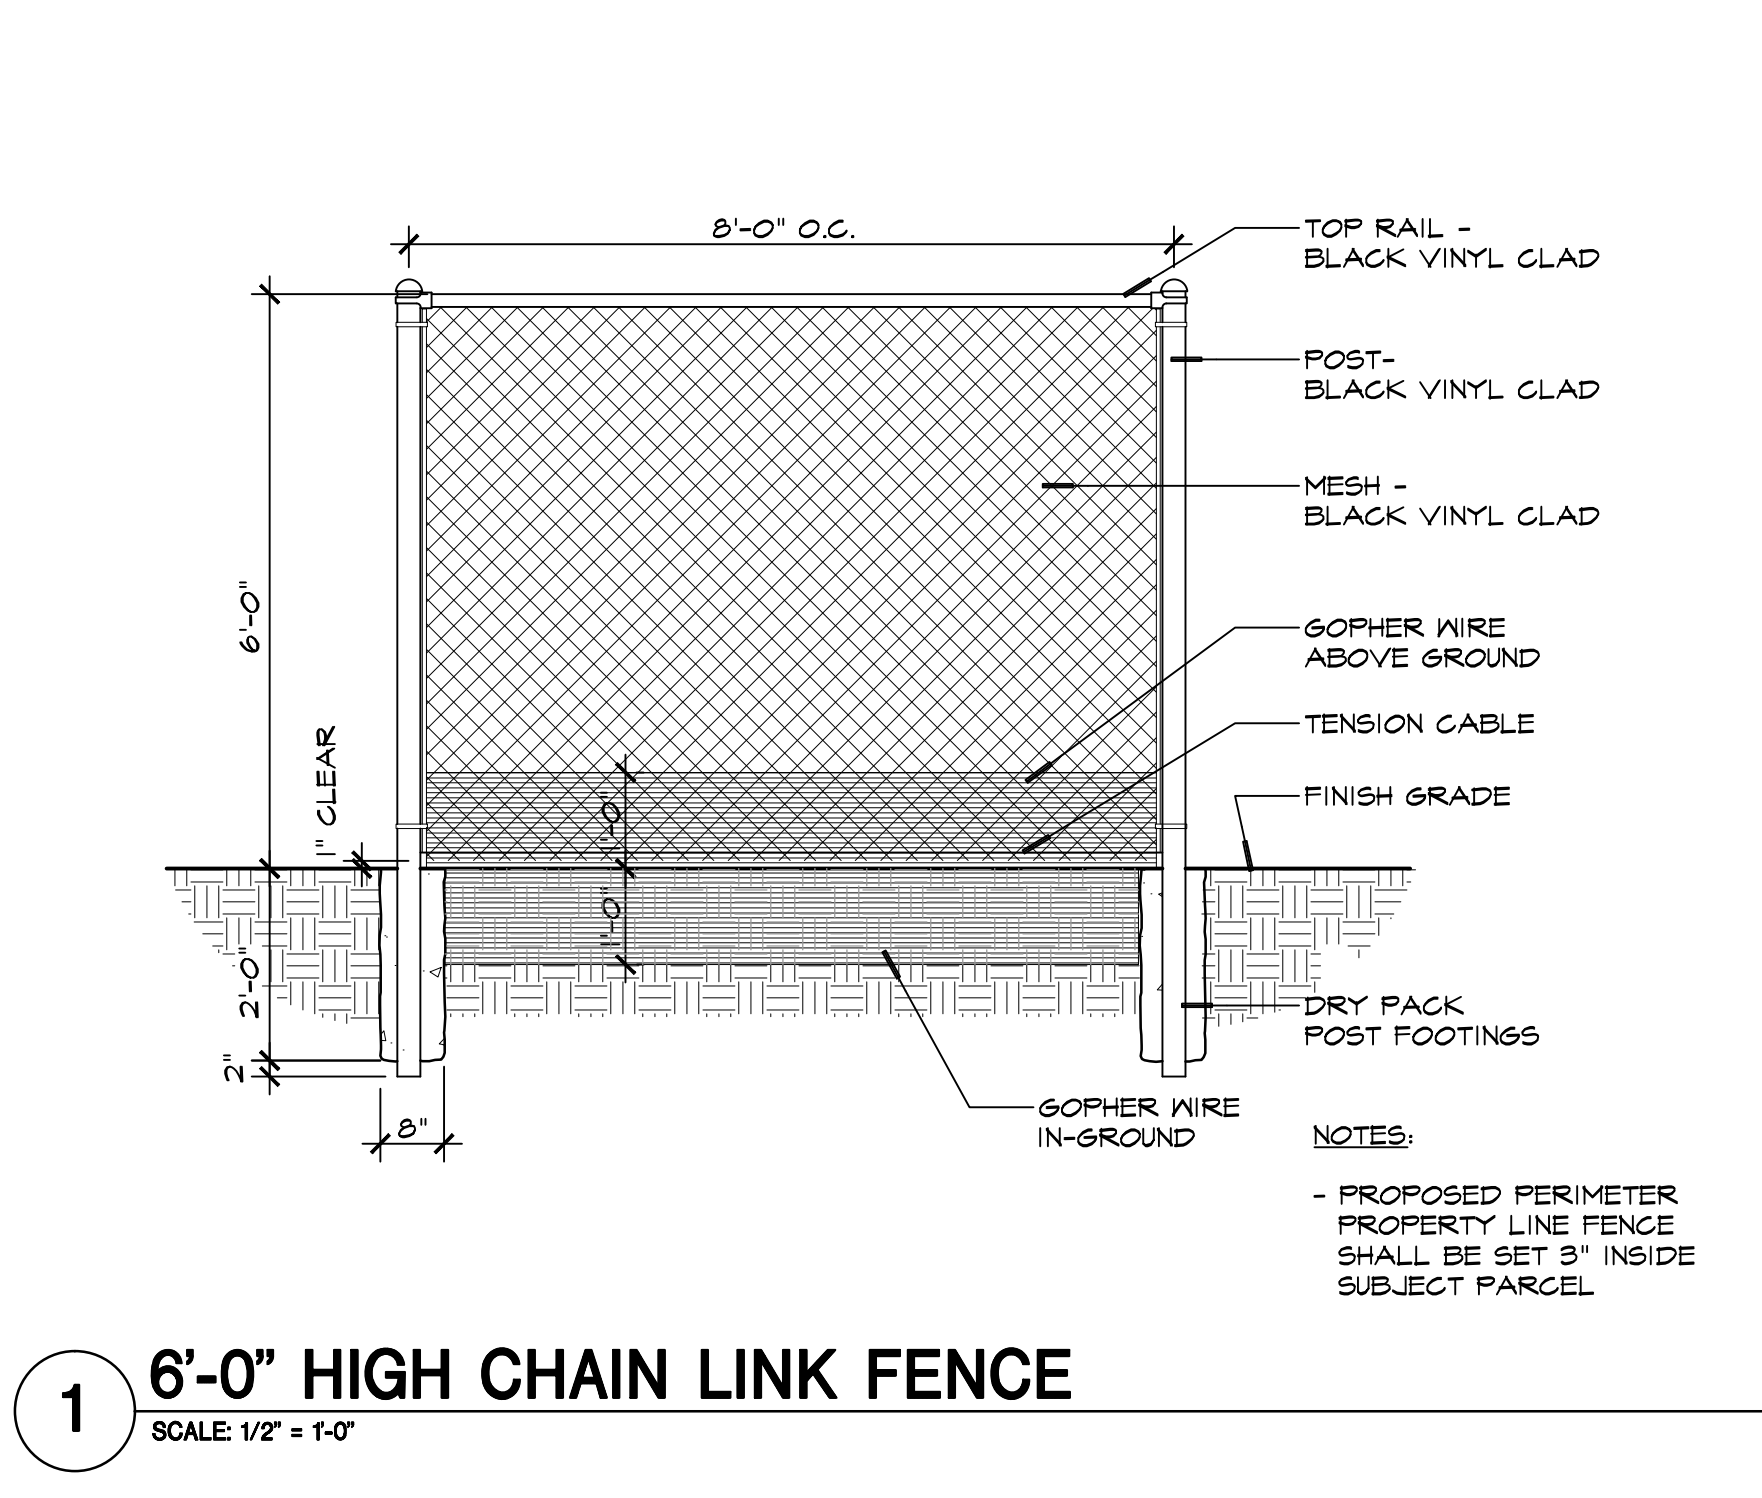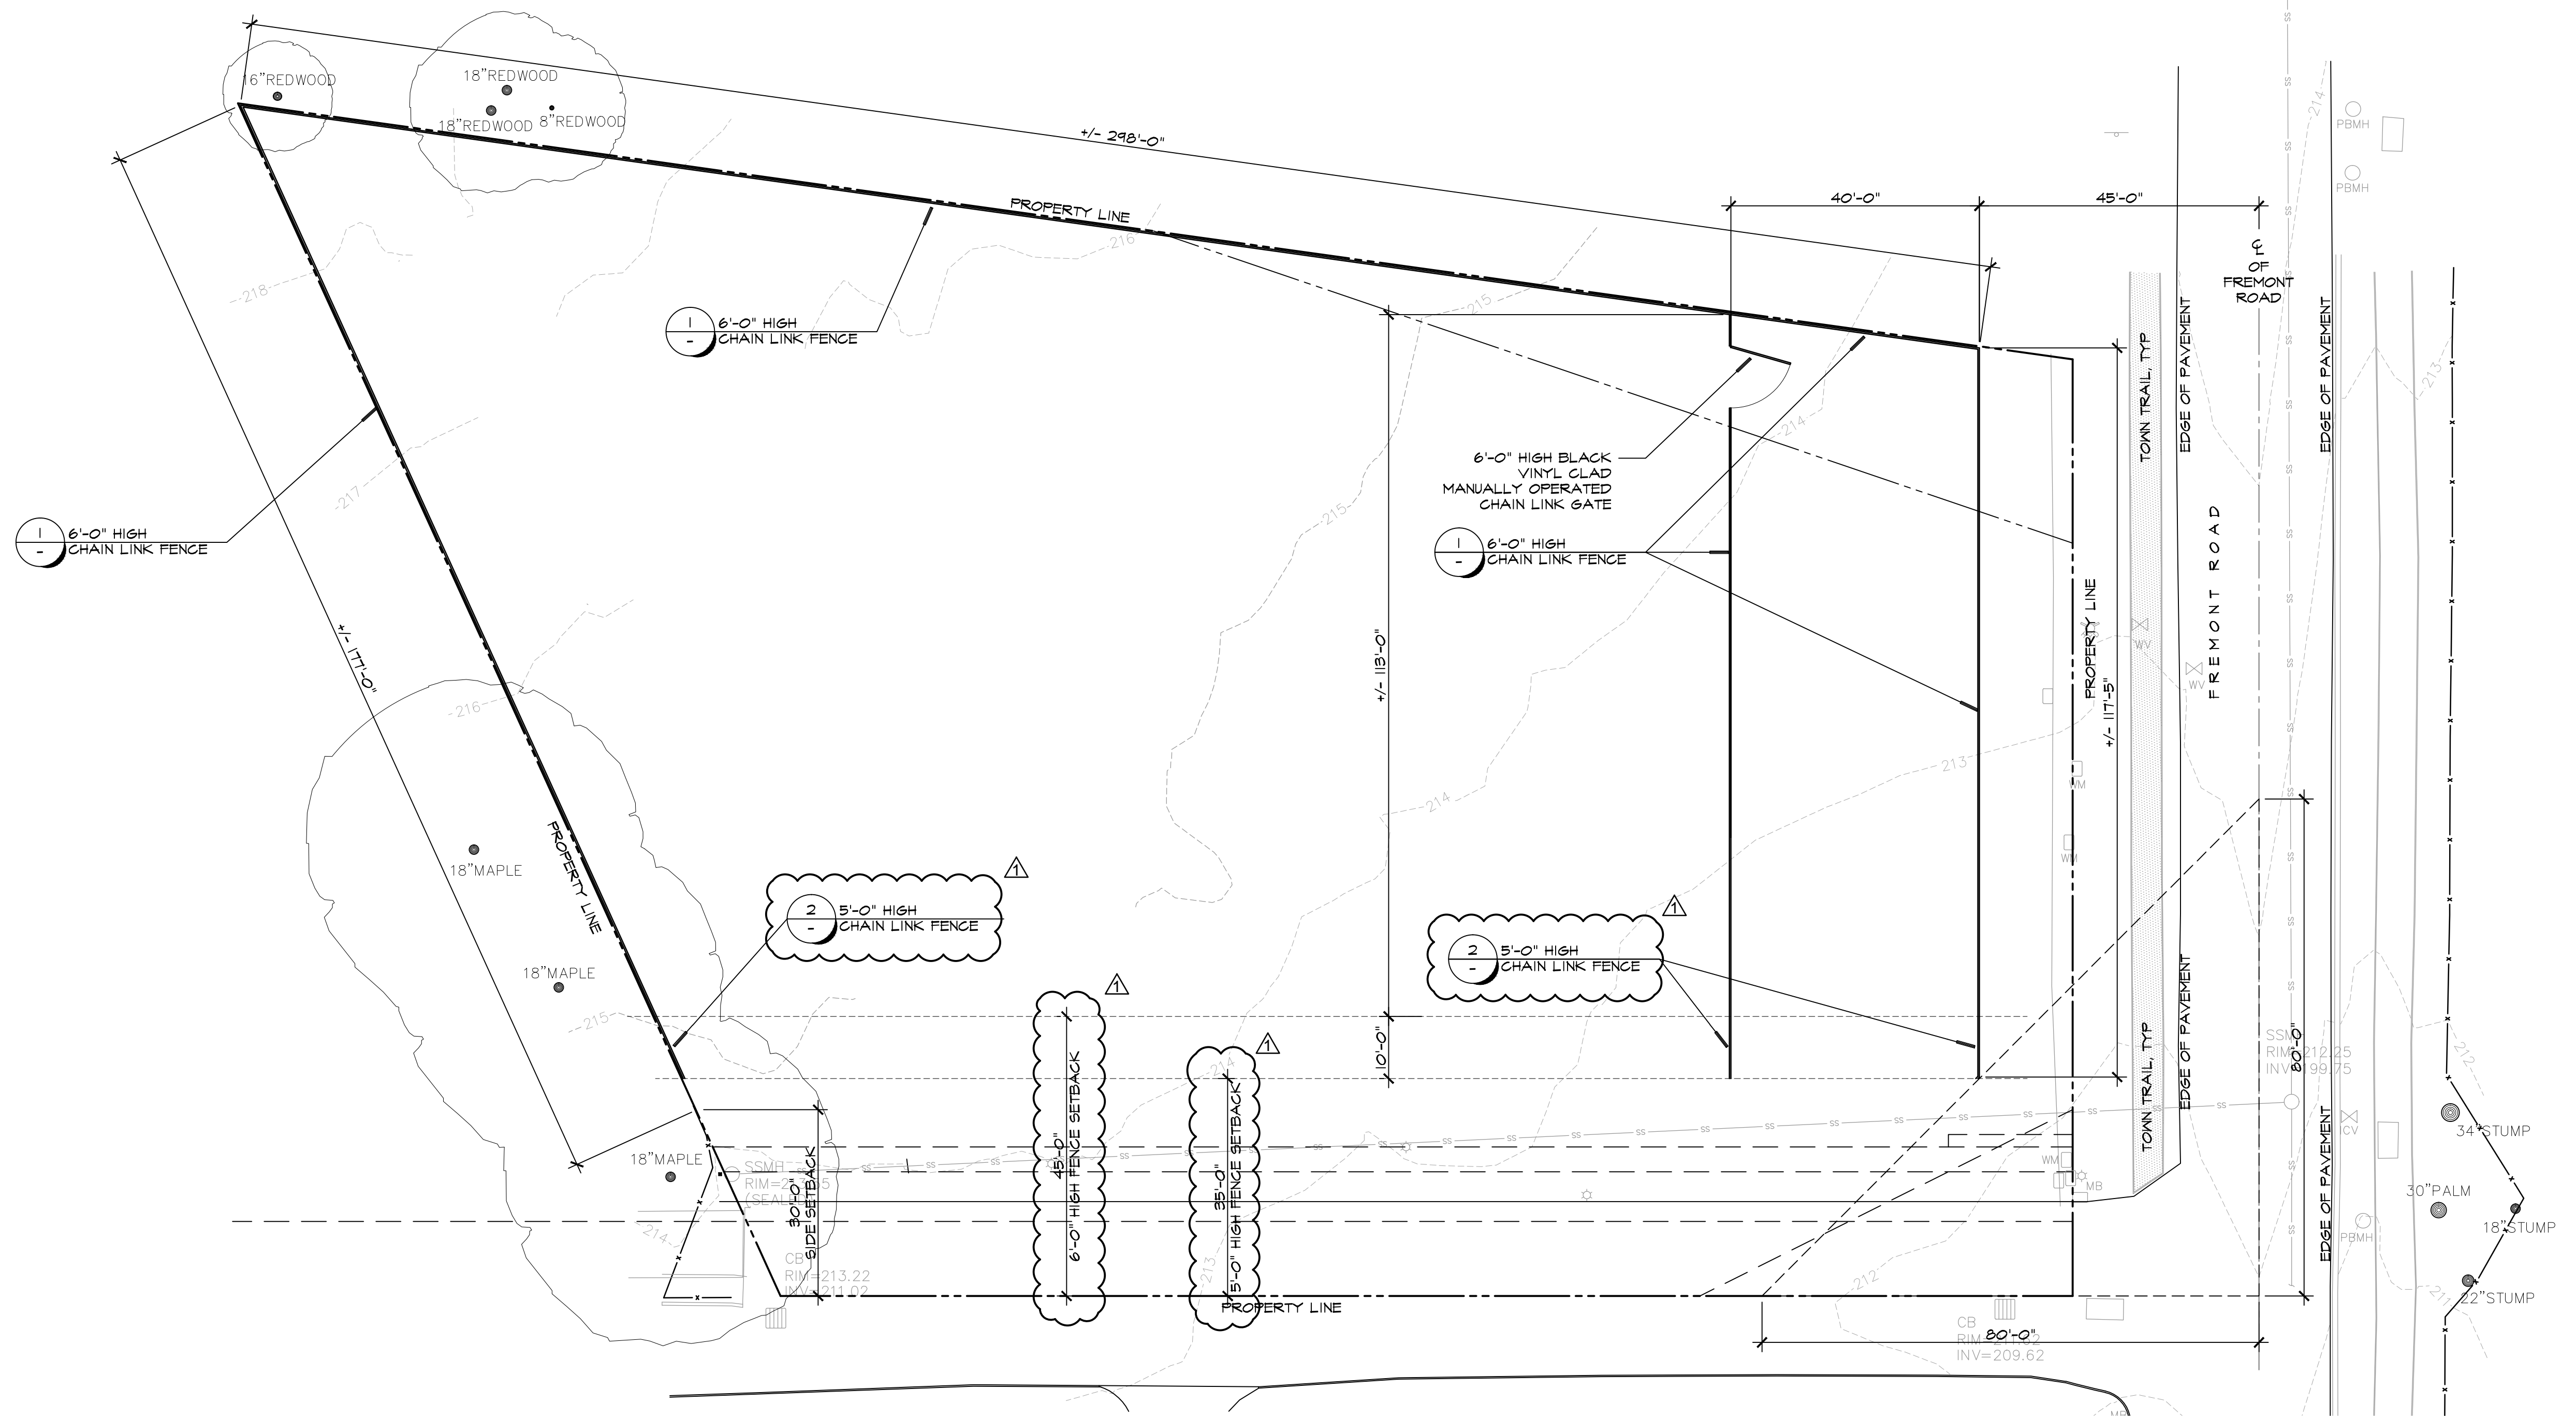

### GENERAL PLANTING NOTES





1. CONTRACTOR TO PROVIDE RECEIPTS FOR SOIL AMENDMENT TO LANDSCAPE ARCHITECT PRIOR TO PLANTING.
2. CONTRACTOR TO VERIFY THE LOCATION OF ALL UNDERGROUND UTILITIES PRIOR TO CONSTRUCTION.
3. PROVIDE 3 INCH DEEP "MINI" BARK MULCH OVER ALL NEW SHRUB AND AREAS.
4. REFER TO THIS SHEET FOR PLANTING AND STAKING REQUIREMENTS.
5. ALL SHRUBS TO BE SET 1/2 THE DIMENSION OF THE SPACING FROM ADJACENT WALKS, CURBS, AND WALLS UNLESS OTHERWISE SHOWN.
6. ALL EXISTING TREES TO REMAIN SHALL BE PROTECTED THROUGHOUT THE DURATION OF THE CONSTRUCTION.
7. FINISH GRADING OF LANDSCAPE AREAS SHALL BE SMOOTH AND FLOWING.
8. SET PLANT CROWNS SLIGHTLY HIGHER THAN EXISTING GRADE TO ENSURE POSITIVE DRAINAGE.
9. REMOVE ALL EXTRANEIOUS MATERIAL FROM PLANTING AREA.
10. PRECAUTIONS SHALL BE TAKEN SO AS NOT TO DAMAGE EXISTING PAVING.
11. THOROUGHLY MIX ALL SOIL AMENDMENTS PRIOR TO PLANT PLACEMENT.
12. CONTRACTOR SHALL SUPPLY PLANTS OF SIZE SPECIFIED. IF CONTRACTOR IS UNABLE TO LOCATE PLANT MATERIAL TYPE OR SIZE, CONTRACTOR SHALL NOTIFY THE LANDSCAPE ARCHITECT.
13. FINAL LOCATIONS OF TREES SHALL BE APPROVED BY THE OWNER PRIOR TO PLANTING.
14. AT PROJECT FINAL 1) CONTRACTOR SHALL PROVIDE COPIES OF ALL PLANT ORDERS TO LANDSCAPE ARCHITECT TO DOCUMENT ACTUAL VARIETIES DELIVERED, AND 2) CONTRACTOR SHALL GUARANTEE ALL PLANT MATERIAL FOR ONE YEAR AFTER FINAL ACCEPTANCE BY THE OWNER.

### SOIL CONDITIONING SPECIFICATIONS

PLANTING AREAS	ROTOTILL INTO TOP 8 INCHES OF SOIL, 4 CUBIC YARDS OF FINE REDWOOD AMENDMENT AND 4 CUBIC YARDS OF DIESTEL STRUCTURAL COMPOST PER 1,000 SQUARE FEET OF AREA.
TREE AND SHRUBS PLANTING HOLES	BACKFILL MIX FOR PLANTING HOLES: 60% TOPSOIL 20% FINE REDWOOD AMENDMENT STABILIZED W/NITROGEN (LYNGSO GARDEN MATERIALS) 20% DIESTEL STRUCTURAL COMPOST(LYNGSO GARDEN MATERIALS)  BACKFILL MIX FOR RHODODENDRON, AZALEA, CAMELLIA, FERNS, AND DAPHNE PLANTING HOLES: 30% TOPSOIL 70% 'RHODODENDRON MIX' (LYNGSO GARDEN MATERIALS)
FERTILIZER TABLETS	21 GRAM, 20-10-5 (N-P-K) WITH CALCIUM, SULPHUR AND IRON PER MANUFACTURER'S  RECOMMENDATIONS AT THE FOLLOWING RATES:  5 GALLON 2 TABLETS 15 GALLON 6 TABLETS 36" BOX 12 TABLETS 48" BOX 14 TABLETS

### PLANTING HOLE SCHEDULE


Trees	Size 36" box 48" box	Width 5'-0" square 6'-0" square	Depth As Detailed As Detailed
Shrubs	Size 5 gal 15 gal 24" box	Width 24" round 36" round 36" round	Depth As Detailed As Detailed As Detailed

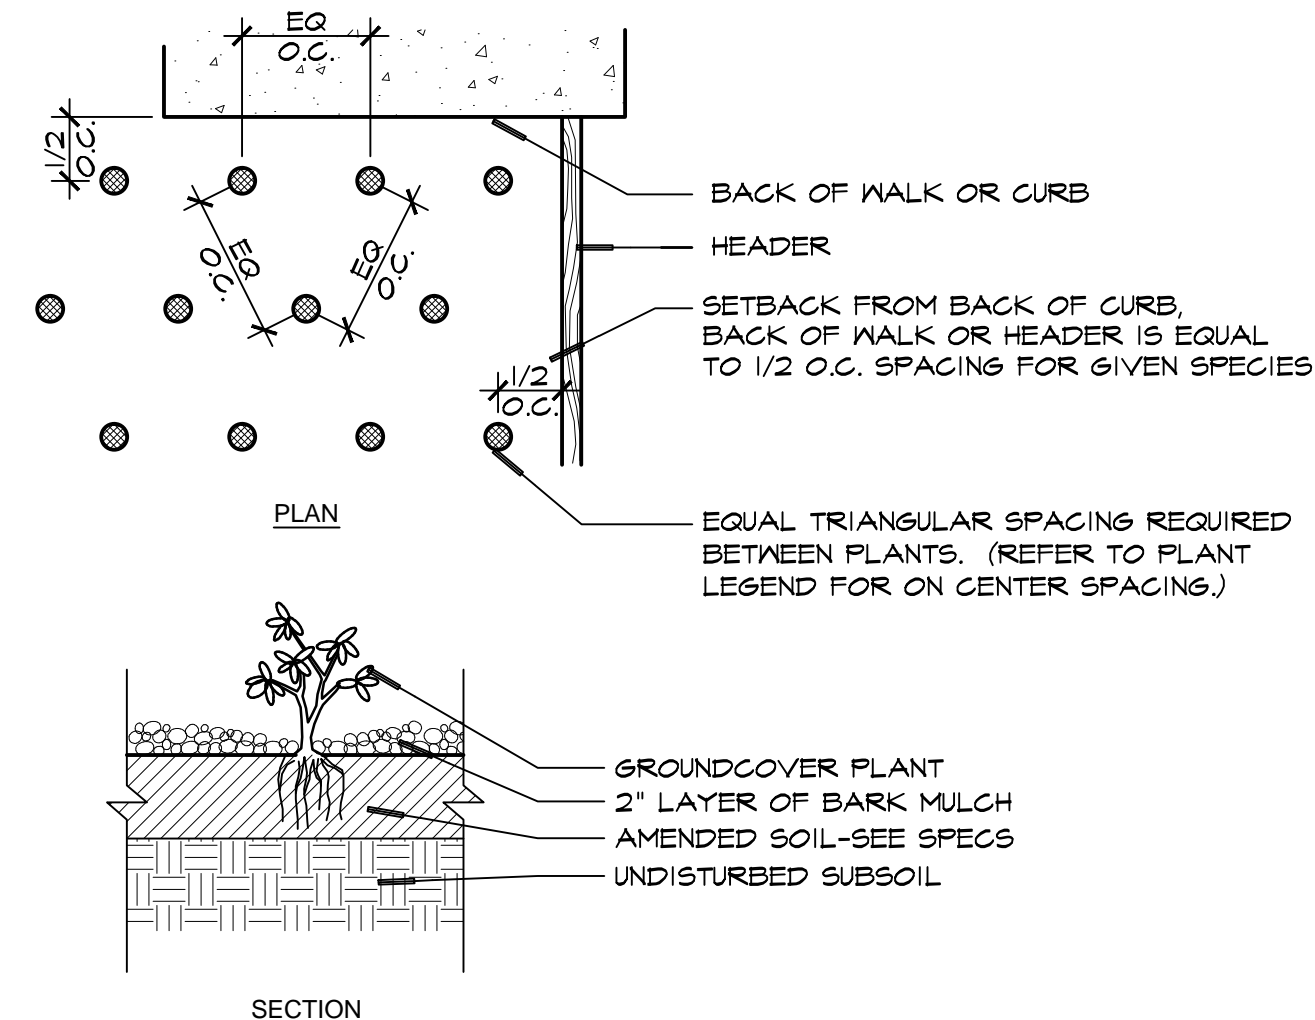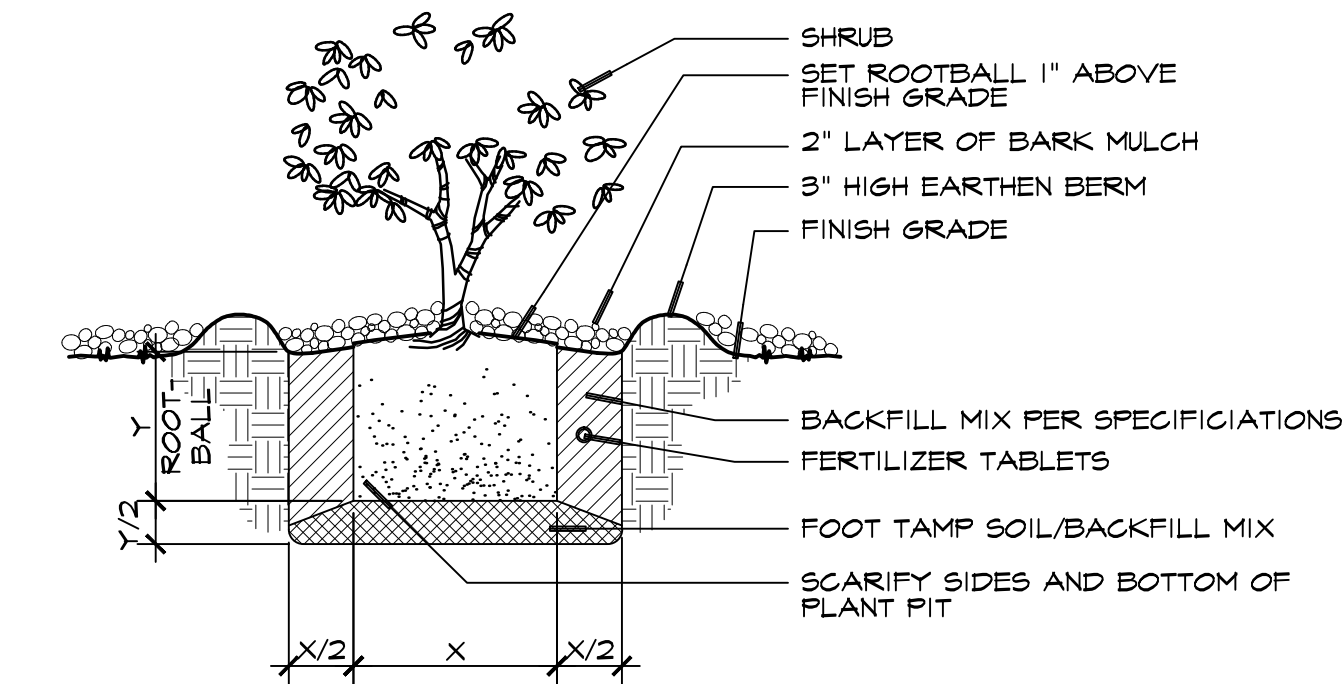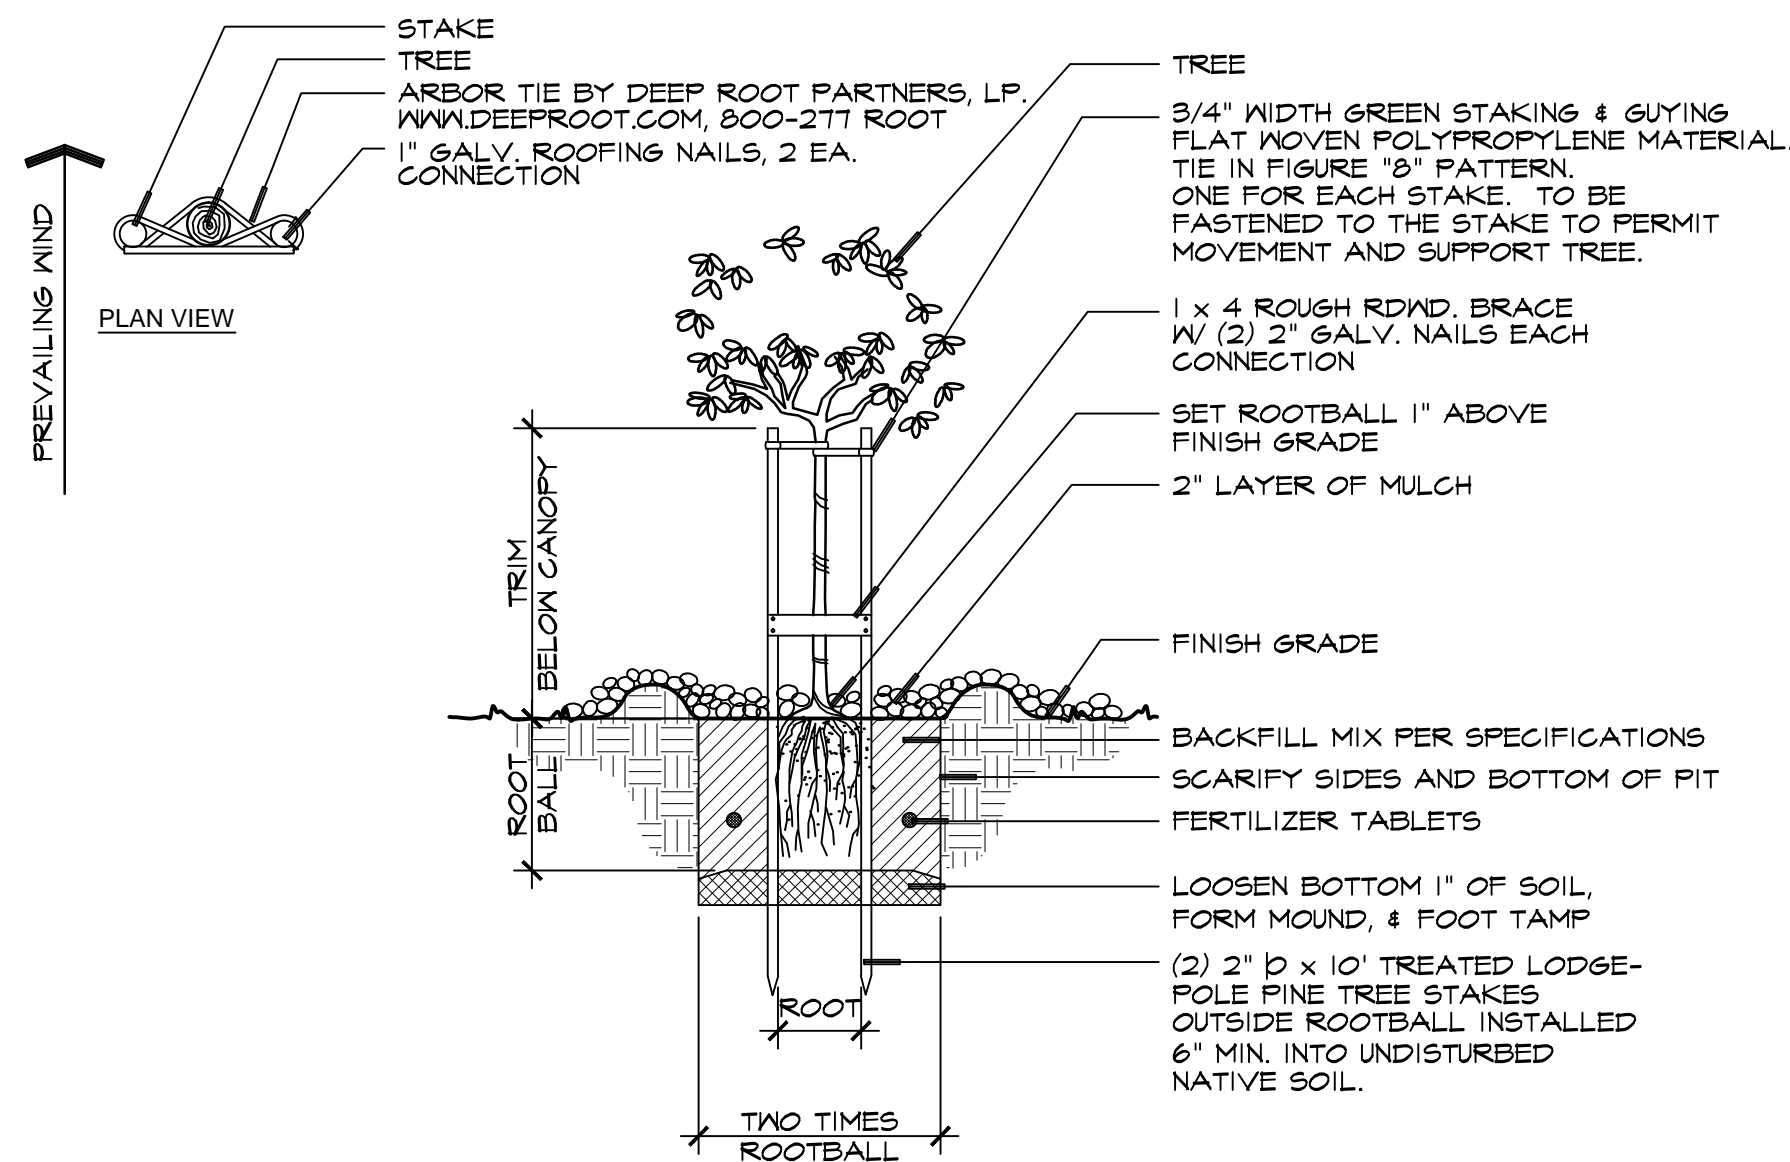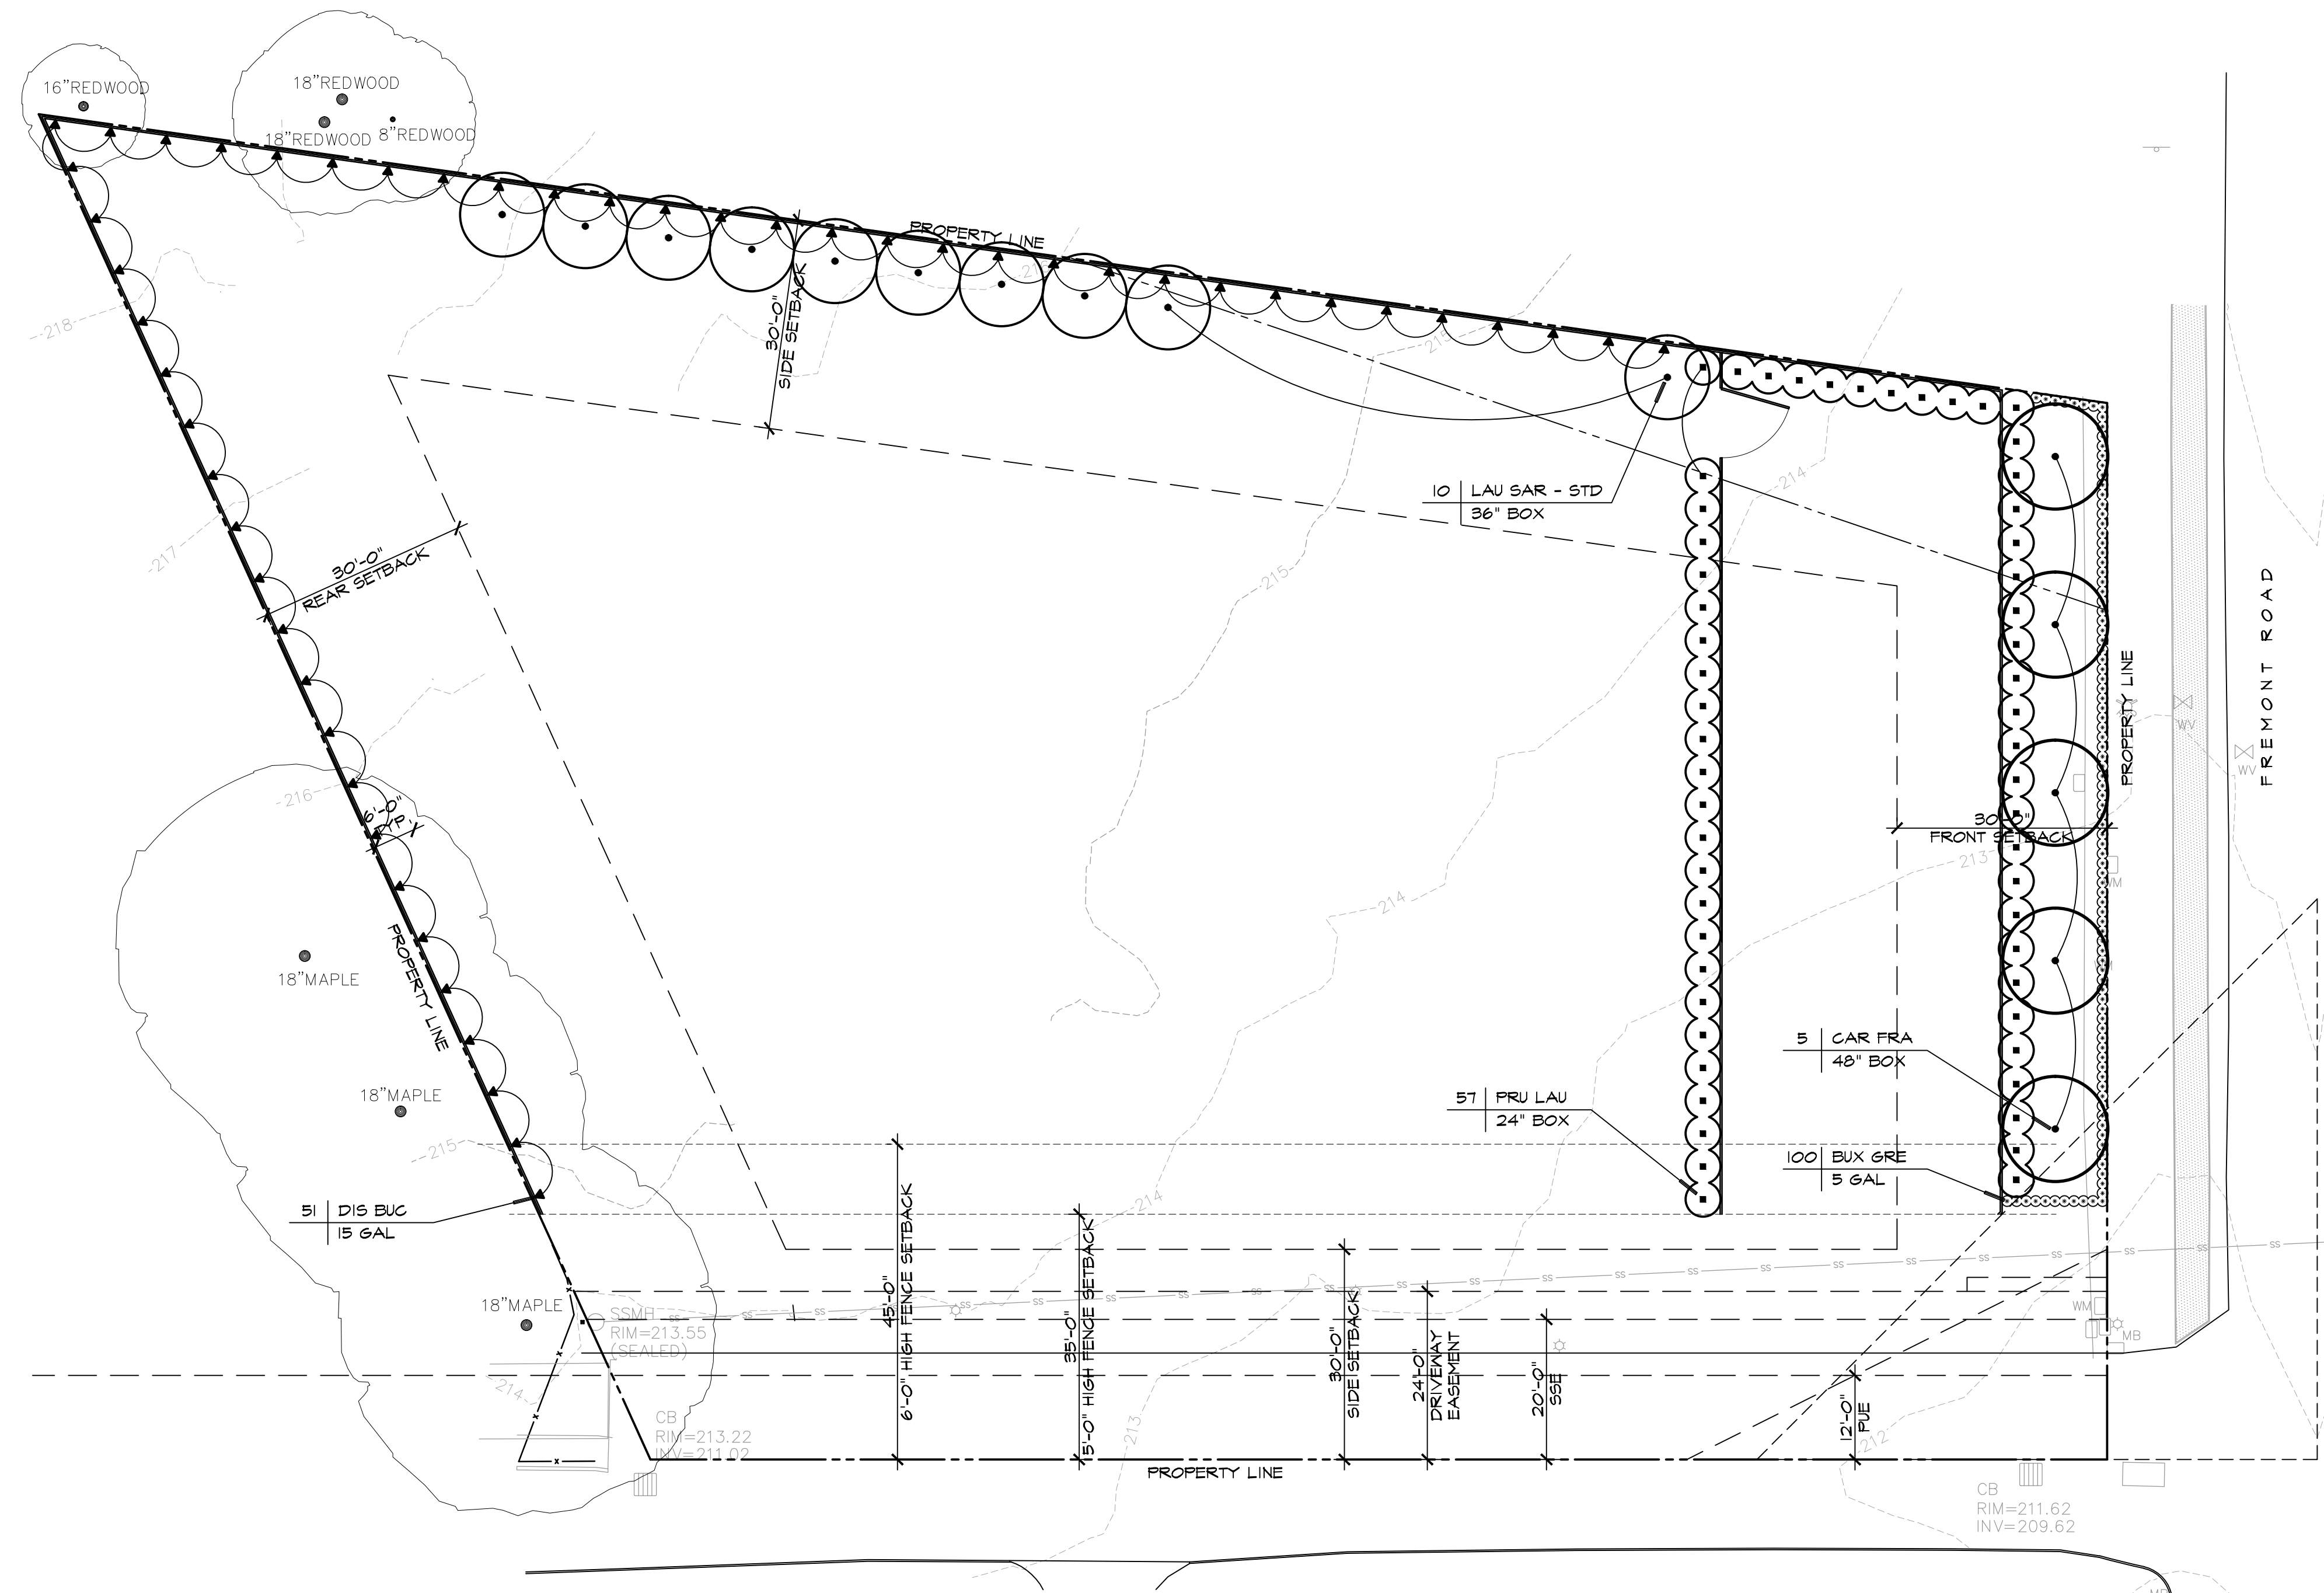

### PLANT LIST

SYMBOL	BOTANICAL NAME	COMMON NAME	SIZE
<b>TREES</b>			
CAR FRA	Carpinus betulus 'Frans Fontaine'	Frans Fontaine Hornbeam	48" box
LAU SAR	Laurus nobilis 'Saratoga'	Saratoga Laurel - Standard Form	36" box
<b>SHRUBS</b>			
BUX GRE	Buxus m. japonica 'Green Beauty'	Green Beauty Japanese Boxwood	5 gal
PRU LAU	Prunus laurocerasus	English Laurel	24" box
<b>VINE</b>			
DIS BUC	Distictis buccinatoria	Blood-Red Trumpet Vine	15 gal

**FENCE PERMIT APPLICATION**

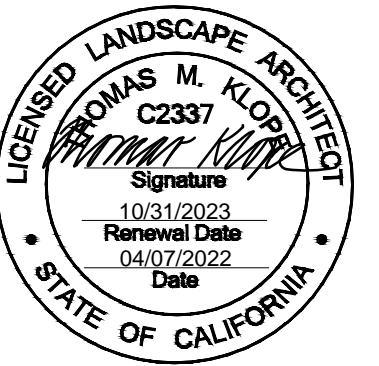

DATE: 04/07/22 REVISION: PER TOWN COMMENTS

**LANDSCAPE SCREENING PLANTING PLAN**

DATE: 03/15/22  
DRAWN: KL  
CHECKED: TK  
SCALE: 1/16" = 1'-0"

